




Product Data

POLYCOAT II
Acrylic/Urethane Enamel
No. 28003/28004

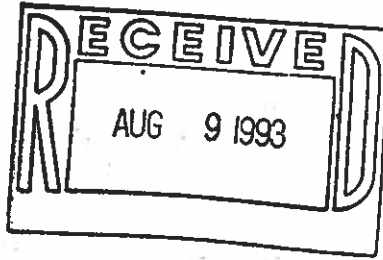

PRODUCT DESCRIPTION

- Type:** Polyurethane, two component high gloss coating, (4.1 mix) that combines the appearance of a high quality enamel and the performance of a chemically cured coating.
- Basic Use:** Protects metal surfaces in marine environments, chemical plants and other corrosive environments. Protects and beautifies transportation vehicles, storage tanks, structural steel, metal siding and walls.
- Composition:**
- | | |
|------------------|-------|
| Vehicle | 81.7% |
| Acrylicurethane | 42.8% |
| Volatile portion | 57.2% |
| Pigment | 18.3% |
- Packaging:** As desired.
- Colors:** Colors available in over 150 Chroma-Chem 844 Color System Selection.
- Finish:** An extremely hard, glossy, weather and chemical resistant film.
- Thinning:** As necessary, with No. 29440 Polycoat II Thinner, MEK or MIBK.
- Spreading Rate:** 330 square feet per gallon, will result in a dry film thickness of 1.5 mils (allows 20% for loss).

TECHNICAL DATA

- Light Reflectance:** Will vary with color.
- Viscosity Range:** 55 to 60 Krebs Units (blended).
- Odor:** Sharp odor of Ketone/aromatic paint thinner.
- Toxic Properties:** None as dry film. Use with adequate ventilation.
- Resistance to Moisture:** Excellent.
- Weight:** 9.60 lbs. per gallon (theoretical).
- Solids Weight:** 53.1% (Blended)
- Solids Volume:** 38.9% (Blended)
- VOC:** 4.48 lbs.

9108G15